


Modernslide

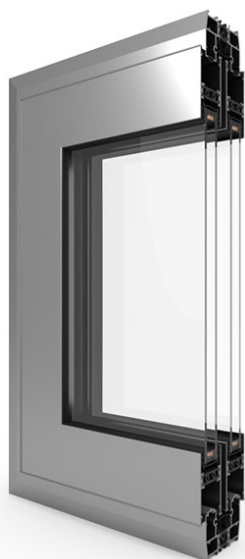

- ✓ frame with the construction depth from 73 to 196 mm
- ✓ sash with the construction depth of 44 mm
- ✓ glazing with glass units of 24, 28 or 32 mm
- ✓ system with a thermal break
- ✓ we lacquer in the full RAL K7 colour palette and, on request, in other colours (use powder code)

1.7

U_w when U_g = 1.1
(Aluminum spacer)

2-3

Guiding Rails

3

Chambers

It is possible to hide the sash almost completely in the wall thanks to Modernslide. Incredibly modern system of light and energy-saving sliding doors. The system can be used to design an extremely aesthetic solution such as Galandage. Thanks to it, you can maximize the opening dimensions when sashes are open.

U_w = 1.7 W/(m²K)* when using the 4 / 16Ar / 4th package – U_g = 1.1 W/(m²K), argon-filled, with an aluminum frame.

*Coefficient calculated for a door with dimensions of 2200 x 2200 mm.

ALUMINUM

DOORS

SLIDING DOORS

ALIPLAST

MODERNSLIDE