


# DucoFlat 80 SR (air pressure-controlled)

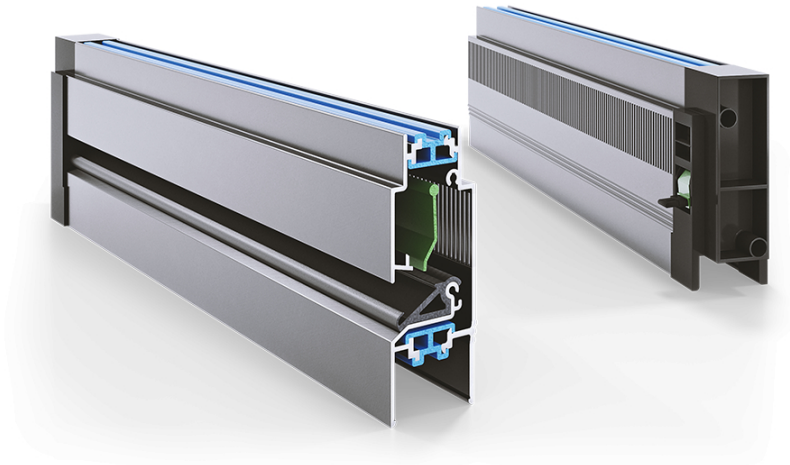

✓ To be mounted on the glass or in an independent window field between the crossbars

✓ Air damper with the degree of opening regulated by means of manual levers

✓ It has a thermal insulator in the cross-section and a perforated insect screen

✓ Maximum glazing thickness: 32 mm

✓ Maximum installation height: 15 m

✓ Air flow at 10 Pa: 68.3 m<sup>3</sup>/h/m

ACCESSORIES

WINDOWS