


# DucoLine 80 SR (air pressure-controlled)

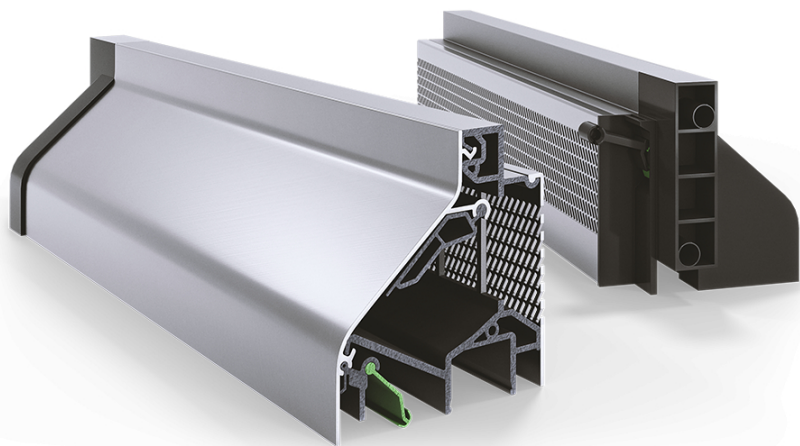

- ✓ To be mounted on the glass or in an independent window field between the crossbars with an adaptive profile
- ✓ Air damper with opening adjustable by means of manual levers
- ✓ It has a thermal insulator in the cross-section and a perforated insect screen
- ✓ Maximum glazing thickness: 46 mm
- ✓ Maximum installation height: 20 m
- ✓ Air flow at 10 Pa: up to 98.5 m<sup>3</sup>/h/m

ACCESSORIES

WINDOWS