


# DucoLine 80 SR (air pressure-controlled)

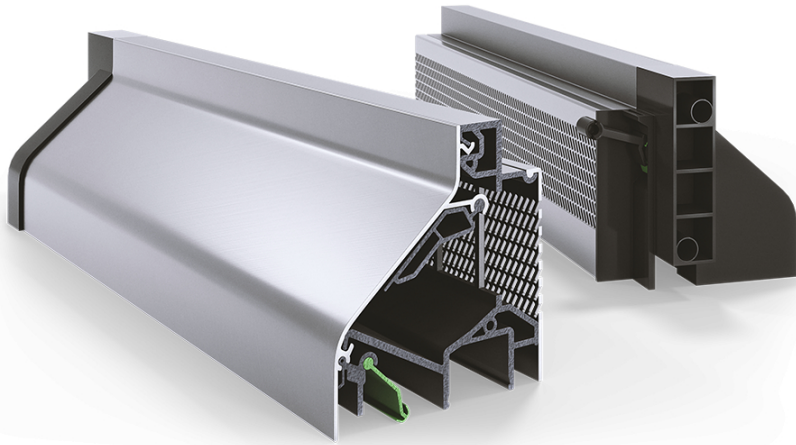

✓ To be mounted on the glass or in an independent window field between the crossbars with an adaptive profile

✓ Air damper with opening adjustable by means of manual levers

✓ It has a thermal insulator in the cross-section and a perforated insect screen

✓ Maximum glazing thickness: 46 mm

✓ Maximum installation height: 20 m

✓ Air flow at 10 Pa: up to 98.5 m<sup>3</sup>/h/m

ACCESSORIES

WINDOWS