


Cortizo Bifold Plus

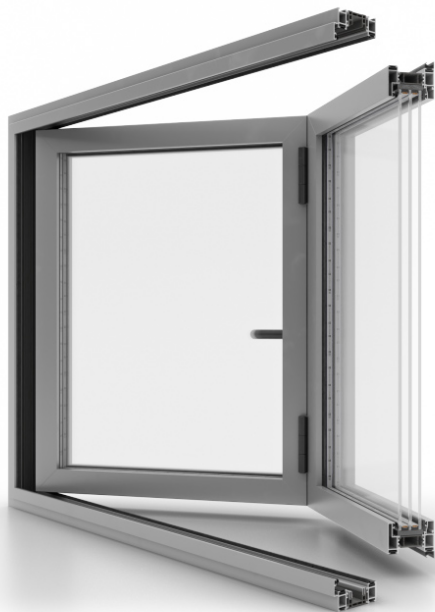

- ✓ Installation depth 80 mm
- ✓ Glazing up to 48 mm thick
- ✓ Maximum leaf dimensions H 3000 mm / L 1200 mm
- ✓ Maximum leaf weight 120 kg
- ✓ Double-sided adjustable connectors as standard
- ✓ Optional low threshold 23.5 mm
- ✓ Optional linear drainage (for 53.5 mm threshold)
- ✓ Exceptionally slender profiles
- ✓ Available two-color (bicolor) option
- ✓ Painting available in any color from the RAL palette, smooth or textured

0.9

Uw for Ug = 0.5
(Ultimate spacer)*

1

Guiding Rails

Cortizo Bifold Plus is part of the exclusive Cortizo aluminum system range. It's designed for large spaces that users can easily appreciate visually and functionally. The slim profiles of Bifold Plus allows it to get more natural light by not sacrificing thermal performances due to thick glazing, despite creating an impressive barrier reaching up to 3 meters in height.

The system is exceptionally versatile. It can have up to 7 leaves, which can open in various configurations, either outwards or inwards. They come standard with double-sided adjustable connectors (compensating profiles), making it easy to assemble even the largest configurations. Customers have the option of choosing a highly efficient and discreet linear drainage with a standard threshold or lowering the threshold to just 23.5 mm.

Cortizo Bifold Plus is a thermally efficient system, equipped with a 45-millimeter thermal barrier. It also offers satisfactory acoustic properties, reducing noise from outside. The leaves can be finished in colors from the RAL palette, either smooth or textured, including wood imitation. Colors for the internal and external sides can be chosen independently.

*Uw value for constructions with dimensions 3000 x 2650 mm