


# MRO

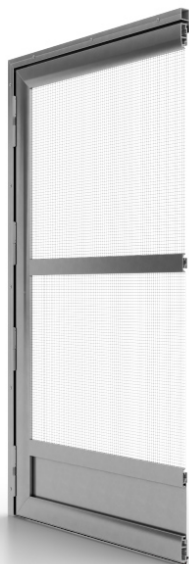

- ✓ frame: extruded aluminium profiles
- ✓ mesh: PVC-coated fibreglass (as standard)
- ✓ height: from 600 to 2500 mm with connecting profile
- ✓ width: from 400 to 1500 mm with connecting profile
- ✓ possibility of using specialist meshes
- ✓ powder coating of profiles in all RAL colours, basic Aluprof colours and selected woodgrain colours

The MRO frame mosquito net for balcony doors is ideally suited to modern joinery, thanks to its rounded profiles, adapted to the aesthetics of the most popular solutions on the market. The MRO door mosquito net can be used with a wide range of doors, even in case of collision with the handle, which is allowed by mounting on an independent aluminum frame.

## Why recommend the MRO door mosquito net:

- It effectively protects against insects, and thanks to specialized meshes, it can provide even more versatile protection.
- It has durable profiles made of extruded aluminum, joined in a way that further strengthens the entire structure.
- It allows for convenient opening and closing with a suitably profiled connecting profile or handles and self-closing hinges.

## Choose the MRO door mosquito net if your client:

- expects very good sealing, guaranteed by brush seals placed around the perimeter of the mosquito net
- values interesting colors of joinery and wants their mosquito net to be as well-matched as possible to the rest of the building
- wants increased mosquito net protection offered by a kick plate, which in the MRO mosquito net can be up to 300 mm high and have a brush seal

## Learn more about the MRO door mosquito net:

- mosquito net frame joined by internal aluminum corners or, optionally, by crimping in a press or using set screws
- possibility of mounting on the door leaf or on a partial aluminum frame
- self-closing aluminum hinges (frame mounting) or PVC (frame or wall mounting)
- possibility of mounting an ergonomic handle inside and/or outside or using a suitably profiled transom
- optional bottom profile (kick plate) available in heights of 100 and 300 mm, equipped with a brush seal
- magnetic strip guaranteeing proper closure, discreetly hidden in the profile
- availability of selected specialized meshes